## Samsung ME95C Large Format Displays

Versatile LFDs with capabilities to support productive business scenarios



### Highlights

- Increase productivity with visual solutions such as sharper, brighter images without shadows and no dazzling or focusing issues with 120 Hz refresh rate
- Enhance customer experience and save energy with innovative technology featuring the world's largest 95inch edge LED LFD with super-narrow bezel, slim depth and energy-efficient design
- Enhance visual attractiveness with symmetric slim bezel design and detachable LED Logo unit
- Simplify management with Samsung MagicInfo<sup>TM</sup> S software embedded solutions and a Plug-in Moduli (PIM)
  - Operate displays remotely using RJ45 and RS-232 wired connections, as well as using WiFi and WiDi standards wirelessly
- Airk multiple displays with Display Port (DP) 1.2 loop
  - Diversify video sources displayed on the same display up to 3 independent sources from large variety of input types

### Improve image quality and functionality with an energy-efficient LFD

LFDs were originally used strictly for signage. Now their use has expanded into unified productivity devices in the business environment, substituting for traditional projectors in meeting rooms and classrooms. Corporate executives also find useful as business intelligence dashboards.

Traditional projectors typically provide poor image quality, annoying shadows and bijnding dazzle. They also emit heat, dust and noise, which distract viewer attention. In addition, projectors are expensive to operate and maintain, consuming energy and causing downtime when costly bulbs need replacement.

Once strictly limited to signage, large format displays (LFDs) are now used in place of projectors in a variety of business applications. With innovative advances in picture quality and energy efficiency, LFDs are a better, clearer and more cost-effective alternative to projectors.

Samsung ME95C LED LFD offer a smarter solution to lamplit projectors with enhanced picture quality, lower power consumption and added versatility. Backlight dimming for broader contrast, a 120 Hz refresh rate for sharper and smoother pictures deliver an enhanced viewing experience. In addition, a built-in media player and energy-efficient LED technology help reduce the total cost of ownership (TCO).

Display sharper images without viewer distractions with Samsung backlit LED LFD technology.



# MagicInfo™ S software and optional PIM provide management flexibility.

#### View ultra-clear pictures without distractions

Samsung ME95C LED LFD deliver high-quality images without the distortion, blur or glare inherent in traditional projectors, providing productive, distraction-free presentations. An ultra-clear panel, backlight dimming and a 120 Hz refresh rate help enhance image detail and readability, providing a better viewing experience.



Figure 1. ME95C can replace conventional projector in meeting room environment.

# Enhance visual attractiveness with slim profi

ME95C has slim profile at mere 45.8 mm (1.80 in.) despite it being the largest sized display in the industry at 95 inches. The slim profile of ME95C allows for light weight as well as flexibility in fitting into the installation space while elevating sophistication of design, even when installed to be protrucing from the wall.

The design of ME95C LFD is as unique as its large size screen, in that the bezel is not only thinner at 12.3 mm (0.48 in.) but the bezel is also symmetric at all sides. This allows ME95C to maintain optimal visual attractiveness at whichever orientation, be it horizontal or vertical.

The symmetric bezel design was made possible with the LED Logo unit that can be detached and attached at the bottom side of either horizontal or vertical orientation. The detachable LED Logo unit with Samsung logo on it acts as IR and external sensor providing control via remote controller when attached to the display. It adds yet another level of visual attractiveness by having the brand logo upright at any orientation.

When multiple ME95C displays are combined to create one video wall, the large display area and the symmetric super narrow bezel design provide near-seamless video wall experience. Businesses can plan and deploy large-scale video walls with less display units and less bezels, significantly reducing distraction.

# Project large-scale images and consume less energy with edge-type LED technology

Samsung ME95C LED LFD provides largest viewing area and is more energy efficient than cold cathode fluorescent light (CCFL) displays. The 95-inch models produce considerably less heat, provide near-silent operation and require less energy to operate compared with traditional projectors.

# Streamline management with Samsung embedded solutions

Samsung ME95C LED LFDs are designed to help simplify management as well as offer customizing options with embedded solutions for today's sophisticated video demands.

## Eliminate the need for a PC media player with Samsung MagicInfo™ S software

Samsung MagicInfo<sup>™</sup> S digital signage software is standard with ME95C LED displays. This all-in-one display solution includes an internal media player, eliminating the need for an external PC. Designed with an intuitive user interface (UI) for ease of use, administrators can manage, organize and schedule content on multiple displays through a web-based interface. The MagicInfo<sup>™</sup> S software connects to the MagicInfo<sup>™</sup> Premium Server to control display functions without a Multi-Display Control (MDC) program. Content can be automatically played through the LFD's internal memory or with a USB thumb drive Plug-and-Play (PNP) feature.





Figure 2. Samsung MagicInfo™ S all-in-one display solution includes an internal media player and signage software.

#### Customize content more easily with an optional Samsung PIM

Display content can be customized with Samsung's optional PIM. This cableless PC solution supports any Open Pluggable Specification (OPS) device that is compatible with Intel® OPS. Designed for ease of installation and use, the compact PIM plugs into the back of the display.

The Samsung PIM installed half embedded will only add 2.2 mm (0.09 in.) additional depth to the 95-inch ME model Fully self-contained, the PIM transfers power and signals internally. This feature eliminates the need for unwieldy cables, offering a less cluttered environment. Users can choose from the following three PIM options:

Dual core (2 GB of RAM) with Microsoft® Windows® Embedded/Standard 7 (WES7), designed for signage with MagicInfo™ i Premium preinstalled

Quad core (4 68 of RAM) with WES7, designed for

 Signage With MagicInfo™ i Premium preinstalled
 Quad core (4 GB of RAM, 128 GB solid state drive (SSD) with Windows 7 Professional preinstalled, designed for e-board usage with MagicIWB (Interactive White Board) 2.0 Basic preinstalled

# Display presentations with versatile options such as a touchscreen overlay and a PIM.

### Control displays remotely with mixed connectivity

Samsung ME95C LED displays offer powerful connectivity, even when working with RJ45 and RS-232 connections. Competitor displays can operate only an RJ45 or RS-232 connection. With the Samsung line of LED displays, both network connections can be used simultaneously. Using a DP 1.2 loop out, a single display image can be shared with nearby displays. This feature eliminates the need to purchase separate video signal distributors for each display, further reducing equipment costs.



Figure 4. Samsung ME95C LED displays enable RJ45 and RS-232 connectivity simultaneously.

### Control displays wirelessly

Samsung ME95C LED display comes with built-in WiFi and WiDi support. Combination with devices that support WiFi and WiDi, ME95C display can have its content streamed and controlled from the source device without the clutter of LAN, RGB, and HDMI cables.



#### Features and benefits

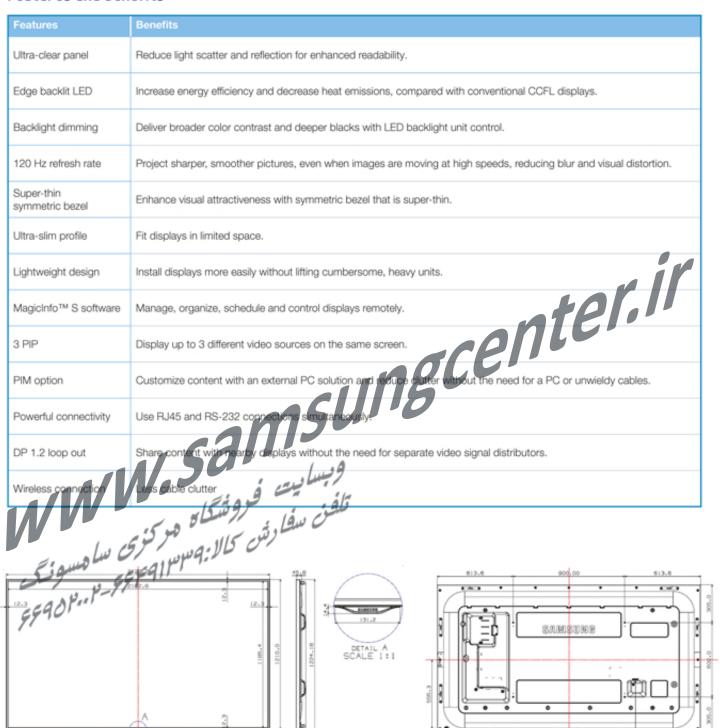


Figure 3. Schematic of model ME95C



## Specifications

			ME95C
	Diagonal size		95 in.
	Type		120Hz LED BLU
	Resolution		1920 x 1080
	Pixel pitch (H x V)		0.2865(H) × 0.8595(V)
	Active display area (H x V)		2096.64(H) x 1179.36(V)
	Brightness (Typ.)		600 cd/m <sup>2</sup>
	Contrast ratio		5,000:1
	Viewing angle (H/V)		178/178
	Response time (G-to-G)		8 ms
	Display colors		10 bit Dithering - 1.07 Billion
	Color gamut		72%
	Dynamic C/R		10,000:1 (AV mode)
	H-scanning frequency		10,000:1 (AV mode) 30 - 81 kHz
Display	V-scanning frequency		48 - 7 <b>6 Hz</b>
	Maximum pixel frequency		/48.5 MHz
	Input		Analog D-sub, DVI-D, DisplayPort 1.2
		Video	HDM11, HDM12 HDM13 Component(CVBS Common)
		Audio	Stereo mini jack
	Output		DP1.2(Loop-out)
		Video	N/A
		Aurici	Stereo mini jack
المراكب مونگ		P	ال N/A وسرا
	External control	P	RS-232C (in/out) thru stereo jack, RJ45
	y an Value	و نتسگار	Stereo mini jack DP1.2(Loop-out) N/A Stereo mini jack N/A Stereo mini jack N/A RS-232C (in/out) thru stereo jack, RJ45 (Detachable LED Logo Type) IR, Ambient Light Internal AC 100 - 240 V (+/- 10%), 50/60 Hz 495 290 1687.95
	Tipe ( )		Internal
	Power supally		AC 100 - 240 V (+/- 10%), 50/60 Hz
	مرس سام	Hex (W/h)	495
	Bowe 5549	Typical (W/h)	290
0	corsan otion (Wo PIM)		1687.95
-690		Sleep mode	Less than 0.5 W
97		Off mode	Less than 0.5 W



## Specifications, continued

			ME95C
		Set	2127.2 × 1210.0 × 45.8 (w/o stand)
Mechanical Specs		Package	2265 x 1405 x 462
			63.7 (w/o stand)
	Weight	Package	89.7
	VESA mount		900*600mm
	Stand type		Foot Stand (Default)
	Media player option type		PIM-B (Attachable)
	Bezel width		12.7mm
	Operating temperature		0°C - 40°C (32°F - 104°F)
Operation	Humidity		10 - 80%
	Key		Large & Slim LFD with Built-in MagicInfotm™ S
Feature  Feature	Special		Magic Clone(to USB), Auto Source Switching & Recovery, Lamp Error Detection, Super Clear Coating, Temperature Sensor, RS232C/RJ45 MDC, Plug and Play (DDC2B), PIP/PBP, Video Wall (19x10) Pivot Display, Image Rotation, Button Lock, DP 1.2 Digital Daisy Chain (Supporting 2x2 UHD Flesolution, HDCP Support), Smart Scheduling, Smart F/W update, Clock Batter (80ff); Clock Keeping) Built In MagicInfo(Lite, Premium-S, Videowall-S), WiFi Embedded, VIID 2x2, Conference Audio, 3-PIP
	امر کردی سا در اساده	Processor On-chip cache memory	Cortex-A9 1GHz Dom Core GPU  1 (VD): 32 KB/32 KB  12 (Unified): 512 KB
		Main memory interface	1GB Dual 32bit DDR3-667 (1333MHz)
		50	2D and 3D graphics engine - Up to 1,920 x 1,080, 32 bpp - Supports OpenGL ES
		Storage (FDM)/Suig	8GB (1.2GB Occupied by O/S, 6.8GB Available, )
		كالانهساس	Video decoder - MPEG-1/2, H.264/AVC (Dual) - VC-1, JPEG, PNG Audio DSP (decoder) - AC3 (DD), MPEG, DTS and so on
		IO ports	USB 2.0
		Operating	Linux®



## Samsung ME95C

## Specifications, continued

		ME95C
Certification	Safety	CUL (USA+Canada): UL60950 TUV (Germany): EN60950 CB (Europe): IEC60950/EN60950 EK (Korea): K60950 CCC (China): GB4943.1 PSB (Singapore): IEC60950 GOST (Russia): IEC60950, EN55022 SIQ (Slovenia): IEC60950, EN55022 PCBC (Poland): IEC60950, EN55022 NOM (Mexico): NOM-001-SCFI-1993 IRAM (Argentina): IRAM SASO (Saudi Arabia): IEC60950 BIS(India): IS13252
	EMC	SASO (Saudi Arabia ) : IEC60950 BIS(India) : IS13252  FCC (USA) FCC Part 15, Subpart B class/A CE (Europe) EN55022, EN55024 VCCI (Japan) V-3 (CISPR24) KCC (Korea) : KN22, KN24 BSMI (Taiwan) : CNS13438 (CISPR22) C-Tick (Australia) / AS/NZS3548 (CISPR22) CCC(Zinina) (GZ) 9254-2008, GB 17625.1-2003
	Environment	TBD
Accessories	Included	Quick Setup Guide, Warranty Card, Application CD, D-Sub cable, Power Cord, Remote Controller, Batteries
	Stand	(In Box)
	Optional M Lim	TBD
	ST AY	N/A PERMILIPINA
Media player	A/VV	PIM (Optional)
سونگ	یاه هرکزی ساهد ۱:۱۳۹۱ ماری	PIM (Optional)  TBD  N/A  PIM (Optional)



#### About Samsung Electronics Co., Ltd.

Samsung Electronics Co., Ltd. is a global leader in semiconductor, telecommunication, digital media and digital convergence technologies with 2011 consolidated sales of US\$143.1 billion. Employing approximately 222,000 people in 205 offices across 71 countries, the company operates two separate organizations to coordinate its nine independent business units: Digital Media & Communications, comprising Visual Display, Mobile Communications, Telecommunication Systems, Digital Appliances, IT Solutions, and Digital Imaging; and Device Solutions, consisting of Memory, System LSI and LCD. Recognized for its industryleading performance across a range of economic, environmental and social criteria, Samsung Electronics was named the world's most sustainable technology company in the 2011 Dow Jones Sustainability Index. For more information, please visit www.samsung.com.

#### For more information





Copyright © 2012 Samsung Electronics Co. Ltd. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co. Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks their respective owners and are hereby recognized and acknowledged

ENERGY STAR is a registered trademark of the U.S

Intel is a registered trademark of Intel Corpo es in the United States, other countries, or by

in the United States, other Linux is a registered tra countries, or both

trademarks of Microsoft Corporation in the countries, or both.

ctronics Co., Ltd. an 3-dong, Yeongtong-gu Suwon-si, Gyeonggi-do 443-772, Korea

www.samsung.com

2013-08